



Part n. 5000-602

FUNCTION

The MiniDisc remote indicator is a light-weight, compact indicator for use in fire protection systems.

The indicator may be used in all installations incorporating detectors, including Series 27™, Alarm Sense®, Orbis®, Explorer, XP95®, Discovery® and I.S. Detectors.

FEATURES

The Minidiscs remote indicator is only 20mm high and 80 mm in diameter. It comprises two parts the base which is installed onto a wall or soffit and which is fitted to the base with a bayonet lock.


An anti-tamper screw in the lid locks the unit together.

Two pairs of keyholes are provided—one for 50mm and the other for 60mm fixing centres

ELECTRICAL CONNECTIONS

Detector Range Connections

Series 27	A & C
AlarmSense	B & C
Orbis	A & C
Orbis Intrinsically Safe	A & C
XPlorer	A & C
XP95	A & C
Discovery	A & C
XP95 Intrinsically Safe	B & C
Voltage, A & C	5–36V
Max current, B & C	25mA, up to 40°C
Operating temperature	–10° to +60°C

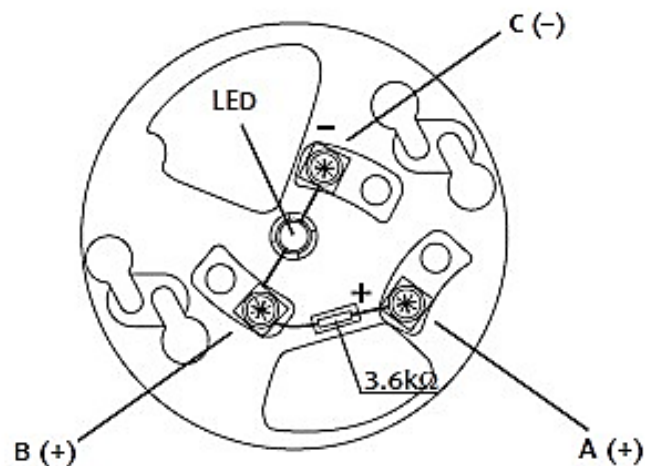

The MiniDisc Remote Indicator is polarity sensitive.

Connect positive line to Terminal A or B and negative

line to Terminal C (See table opposite)